


ELLISSE PENDANT MAJOR

Federico Palazzari

Collezione di lampade LED a sospensione e terra/parete disponibile in diverse versioni: major, minor, double, triple e mega, per luce diffusa diretta o indiretta. Realizzate in estruso di alluminio verniciato bianco opaco, nero opaco, alluminio spazzolato, oro lucido anodizzato o oro verniciato. Diffusore in metacrilato opalino.

Ellisse è realizzata attraverso una tecnologia ingegnerizzata da Nemo per l'accoppiamento degli estrusi.

La versione Major è disponibile anche da terra e da parete, con base in marmo nero per la versione terra e accessorio per aggancio a muro nella versione a parete.

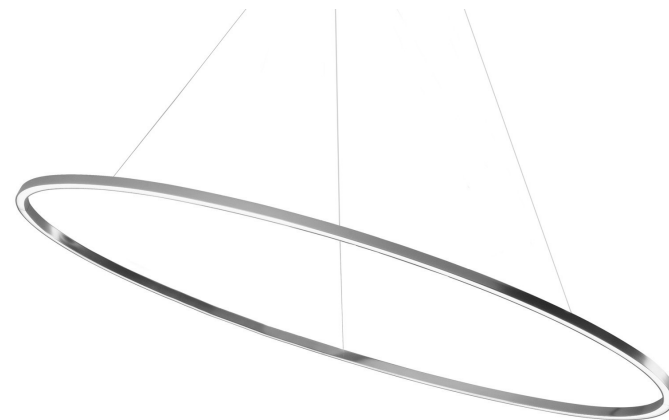

DOWNLIGHT 2700K

LAMPING

Source	linear LED
Total power	66W
Emission	diffused orientable
Switching	dimnable 1-10V
Tension	110/240V
Color temperature	2700K
Luminous flux	3450lm
Typ CRI	85
Energy class	A+
Materials	Aluminium
Notes	adjustable cable length from 2,5m to 0,4m, DALI version on request

Codes

ELP LW2 54
ELP LN2 54
ELP LO2 54
ELP LL2 54
ELP LGW 54


Structure/Diffuser

white/white
black/white
gold painted/white
polished aluminium/white
gold polished anodized/white

PACKAGE

Package 01
Dimension: 15x80x150 cm / Gross weight: 7,5 kg

Certificazioni

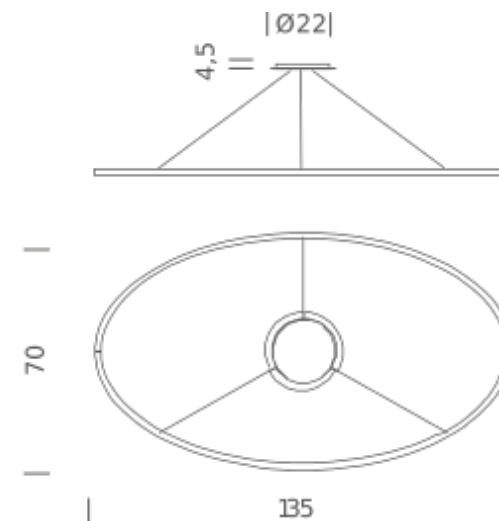

DOWNLIGHT 3000K

LAMPING

Source	linear LED
Total power	66W
Emission	diffused orientable
Switching	dimnable 1-10V
Tension	110/240V
Color temperature	3000K
Luminous flux	3450lm
Typ CRI	85
Energy class	A+
Materials	Aluminium
Notes	adjustable cable length from 2,5m to 0,4m, DALI version on request

Codes

ELP LWW 54
ELP LNW 54
ELP LOW 54
ELP LLW 54

Structure/Diffuser


white/white
black/white
gold painted/white
polished aluminium/white

PACKAGE

Package 01

Dimension: 15x80x150 cm / Gross weight: 7,5 kg

Certificazioni

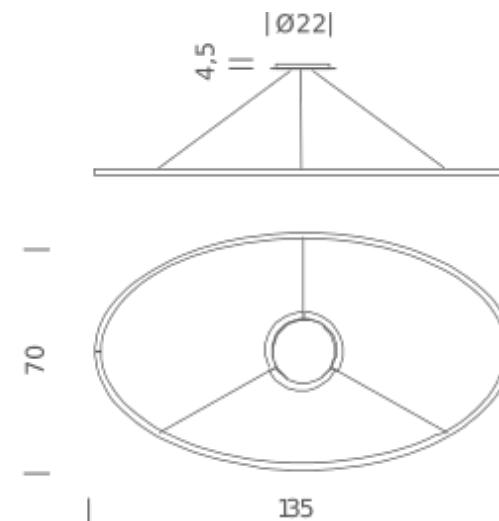

UPLIGHT 2700K

LAMPING

Source	linear LED
Total power	66W
Emission	diffused orientable
Switching	dimnable 1-10V
Tension	110/240V
Color temperature	2700K
Luminous flux	3450lm
Typ CRI	85
Energy class	A+
Materials	Aluminium
Notes	adjustable cable length from 2,5m to 0,4m, DALI version on request

Codes

ELP LW2 53
ELP LN2 53
ELP LO2 53
ELP LL2 53
ELP LGW 53

Structure/Diffuser


white/white
black/white
gold painted/white
polished aluminium/white
gold polished anodized/white

PACKAGE

Package 01

Dimension: 15x80x150 cm / Gross weight: 7,5 kg

Certificazioni

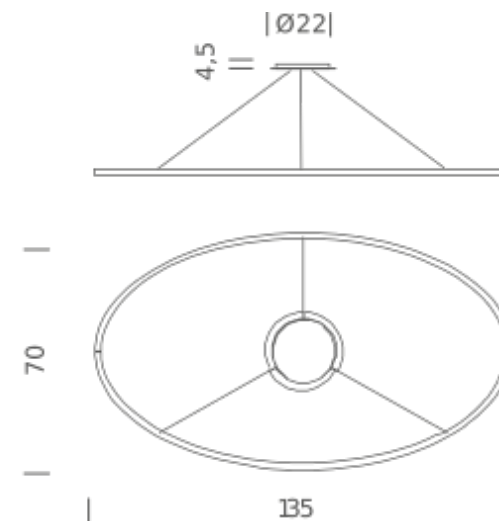

UPLIGHT 3000K

LAMPING

Source	linear LED
Total power	66W
Emission	diffused orientable
Switching	dimnable 1-10V
Tension	110/240V
Color temperature	3000K
Luminous flux	3450lm
Typ CRI	85
Energy class	A+
Materials	Aluminium
Notes	adjustable cable length from 2,5m to 0,4m, DALI version on request

Codes

ELP LWW 53
ELP LNW 53
ELP LOW 53
ELP LLW 53

Structure/Diffuser

white/white
black/white
gold painted/white
polished aluminium/white

PACKAGE

Package 01

Dimension: 15x80x150 cm / Gross weight: 7,5 kg

Certificazioni

